

Rechargeable Lithium Coin Batteries


Vanadium Pentoxide Lithium Rechargeable Batteries (VL series)



Features

These coin-type lithium batteries feature vanadium oxide for the positive pole, lithium alloy for the negative pole and a non-aqueous solvent for the electrolyte.

Construction

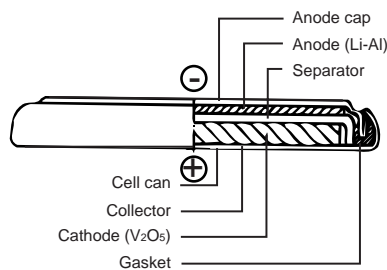

Applications

- Memory backup power supplies for office automation equipment (personal computers, fax machines, etc.), audio-video equipment (VTRs, etc.), communications equipment (mobile phones, etc.), etc.
- Hybrid systems with solar batteries (solar remote controllers, etc.)



General Specifications

Model	Electrical Characteristics (20°C)			Dimensions (mm)		Weight (g)	JIS	IEC
	Nominal Voltage (V)	*Nominal Capacity (mAh)	Continuous Drain (mA)	Diameter	Height			
VL621	3	1.5	0.01	6.8	2.1	0.3	-	-
VL1216	3	5.0	0.03	12.5	1.6	0.7	-	-
VL1220	3	7.0	0.03	12.5	2.0	0.8	-	-
VL2020	3	20.0	0.07	20.0	2.0	2.2	-	-
VL2320	3	30.0	0.10	23.0	2.0	2.8	-	-
VL2330	3	50.0	0.10	23.0	3.0	3.7	-	-
VL3032	3	100.0	0.20	30.0	3.2	6.3	-	-

* Nominal capacity shown above is based on standard drain and cut off voltage down to 2.5V at 20°C.

Vanadium Pentoxide Lithium Rechargeable Batteries (VL series)

Charging

■ Charging circuits


Charging/discharging cycle	Approx. 1,000 times at 10% discharge depth to nominal capacity
Charging system*	Constant-voltage charging. (Please strictly adhere to the specified charge voltage)
Operating temperature	-20°C ~ +60°C

* Consult with Panasonic concerning constant-current charging systems.

The charging circuit is crucial in terms of ensuring that full justice will be done to the battery characteristics. Consider it carefully as the wrong charging circuit can cause trouble.

■ Precautions regarding the charge voltage setting

Under no circumstances should trickle charging, which is used for nickel-cadmium batteries, be used. Ignoring this precaution will cause the battery voltage to rise to about 5V, resulting in a deterioration of performance.

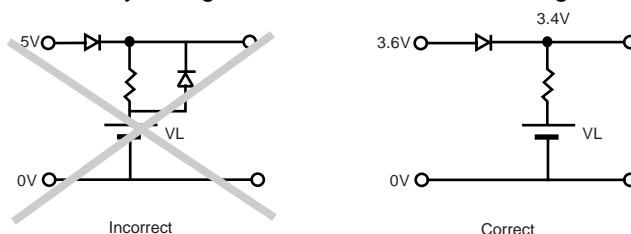

■ Charge voltage range

If a fixed-charging method is applied, please adhere to the specified charging voltage.

The guaranteed value over an operating temperature range from -20 to +60°C is $3.4V \pm 0.15V$. (Actual value: $3.4V \pm 0.20V$)

* If the charging voltage exceeds the specifications, the internal resistance of the battery will rise and may cause battery deterioration. Also, with a charge voltage around 4V, corrosion of the (+) terminal (case) may occur, causing leakage. ("Influence of charge voltage" page 69.)

* It is not possible for the battery capacity to recover completely when the charging voltage is below the specification.

■ Recommended charging circuits

● Basic conditions

Charge voltage: $3.4V \pm 0.15V$

Charge current: For a battery voltage of 3V

VL621 Approx. 0.2 mA or below

VL1216, VL1220 Approx. 0.5 mA or below

VL2020 Approx. 1.5 mA or below

VL2320, VL2330 Approx. 2.0 mA or below

VL3032 Approx. 4.0 mA or below

(It is permissible for the current to increase beyond the above level when the battery voltage drops below 3V.)

■ Mixed usage of batteries

Do not use these batteries and lithium primary batteries or other rechargeable batteries together, and do not use new batteries and old batteries together even if they are of the same type.

Vanadium Pentoxide Lithium Rechargeable Batteries (VL series)

Charging

● Reference: Examples of 5-V charging circuits

①

Standard circuits
 For D2, select a diode of small inverse current ($I_r = 1\mu\text{A}$ below / 5V)
 D1, D2: MA3X716 (Diode type code)
 D3: MA3X704, MA2J728

	R1	R2
VL621	2.2k Ω	5.6k Ω
VL1220, VL1216	750 Ω	2000 Ω
VL2020	200 Ω	510 Ω
VL2320, VL2330	150 Ω	390 Ω
VL3032	68 Ω	160 Ω

②

Pat No. JP284170

Simple economical circuits
 D: MA2J728: Very small reverse current

Load with 5V applied	1mA below	
	0 ~ 0.30V	
D, Vf	R1	R2
VL621	6.2k Ω	2.4k Ω
VL1216, VL1220	1500 Ω	560 Ω
VL2020	470 Ω	180 Ω
VL2320, VL2330	390 Ω	150 Ω
VL3032	180 Ω	68 Ω

Vf of D will be different from the value given at left if a current in excess of 1mA flows to the load during operation. Compensation must be provided by the resistors in such cases.

③

	ZD	D1	R1	Common to all types
A	MAZ30360L	MA3X704	300 Ω	
B	MAZ30360H	MA2J728	270 Ω	

Type	VL3032	VL2330	VL2320	VL2020	VL1220	VL1216	VL621
R2		Not required			470 Ω		1.5k Ω
		Not required			560 Ω		1.6k Ω

For D2, select a diode of small inverse current ($I_r = 1\mu\text{A}$ below / 5V)

④ For minimizing current leakage due to resistance, etc., as when charging by another battery.

REG	D
3.7V	MA2J728

For details, refer to the constant voltage element specifications

⑤ Zener control

ZD: HZ2ALL
 R: 43 Ω /VL2320
 68 Ω /VL2020
 D: MA2J728 or MA3X704
 Patent pending

Select a diode having an inverse current as small as possible. ($I_r = 1\mu\text{A}$ below / 5V)

⑥ LED control

LED
 R=51 Ω for VL2320
 D: MA2J728 or MA3X704

⑦ Transistor contro (for VL2320)
 R1: 4.3k Ω R2: 15.0k Ω R3: 680 Ω

⑧ Parallel circuit

Panasonic

LITHIUM HANDBOOK


AUGUST 2003

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact Panasonic for the latest information.

Vanadium Pentoxide Lithium Rechargeable Batteries (VL series)


Charging

● Charging characteristics

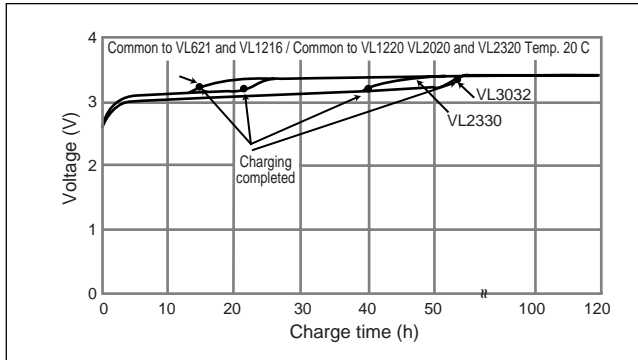

● Influence of charge voltage on VL batteries

If the charge voltage goes beyond its adequate range, battery performance may deteriorate early. Be sure to observe the recommended charge voltage.

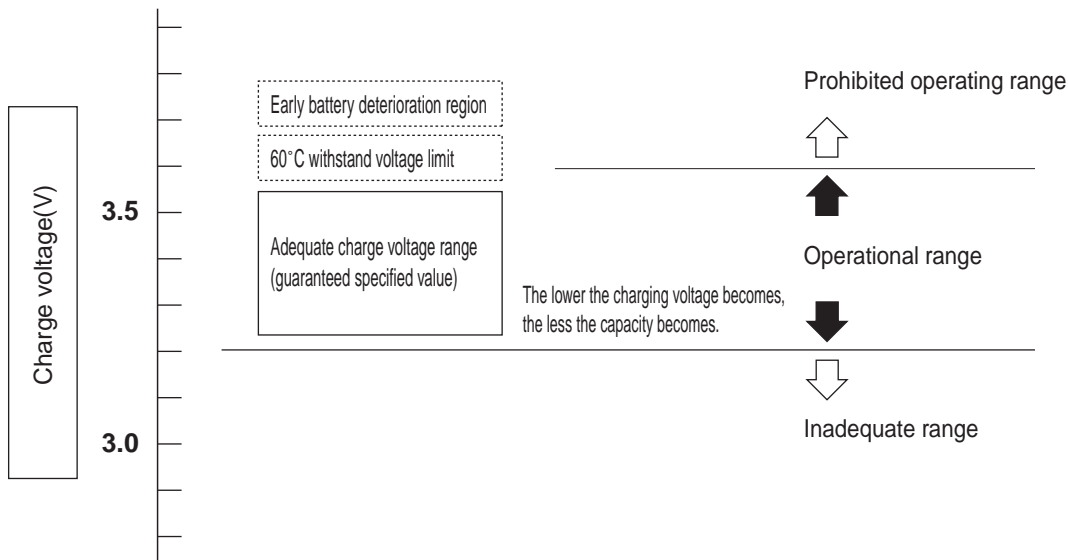

○ UL recognition conditions

When a protective component is shorted or opened, the maximum charge current is regulated to the following Value : 300mA